

CR30XS series cylindrical capacitive sensor



Feature description

- Integrated housing matches double highlighted LED indicator
- IP68 protection class which is effectively moisture-proof and dust-proof
- Enhance detection distance. Sensitivity adjustment adopts multi-turn potentiometer so as to reach higher adjustment accuracy
- High reliability, excellent EMC design with protection against short circuit, overloaded and reverse polarity
- Widely used in both metal and non-metal (plastic, powder, liquid, etc.) material testing



Model specification

NPN NO	CR30XSCN25DNOY-E2	PNP NO	CR30XSCN25DPOY-E2
NPN NC	CR30XSCN25DNCY-E2	PNP NC	CR30XSCN25DPCY-E2
NPN NO+NC	CR30XSCN25DNRY-E2	PNP NO+NC	CR30XSCN25DPRY-E2


Specifications

Installation type	Non-flush	Indicator	Output indication:Yellow LED;Power indicator:Green LED
Rated distance Sn	25mm ^①		Overload or short circuit indication:Yellow LED flashes
Ensure distance Sa	≤18mm	Switching frequency	20Hz
Adjust the distance	4...30mm	Ambient temperature	When working:-25...70°C(No icing, No condensation)
Adjustment method	Multi-turn potentiometer (Electrical adjustment > 10)		When storing:-30...80°C(No icing, No condensation)
Standard test object	Fe 75*75*1t(Grounded) ^②	Environment humidity	35...95%RH(No icing, No condensation)
Supply voltage	10...30VDC	Vibration resistant	10...55Hz,Dual amplitude 1mm(2 hours
Load current	≤200mA	Impulse withstand	30g/11ms,3 times each for X,Y,Z direction
Residual voltage	≤2V	High pressure resistant	1000V/AC 50/60Hz 60s
Consumption current	≤20mA	Insulation resistance	≥50MΩ(500VDC)
Switch point offset [%/Sr]	≤±10%	Shape specification	M30*1.5*96mm
Temperature drift [%/Sr]	≤±20%	Protection degree	IP68
Hysteresis range [%/Sr]	3...20%	Housing material	PBT
Repetitive error [R]	≤5%	Connection type	M12 Connector
Circuit protection	Short circuit protection, Overload protection,	Accessories	M30 nuts×2, Slotted screwdriver, Operation manual
	Reverse polarity protection		

Note: ①the factory default sensing distance is $Sn \pm 10\%$

②unit:mm

Dimensions

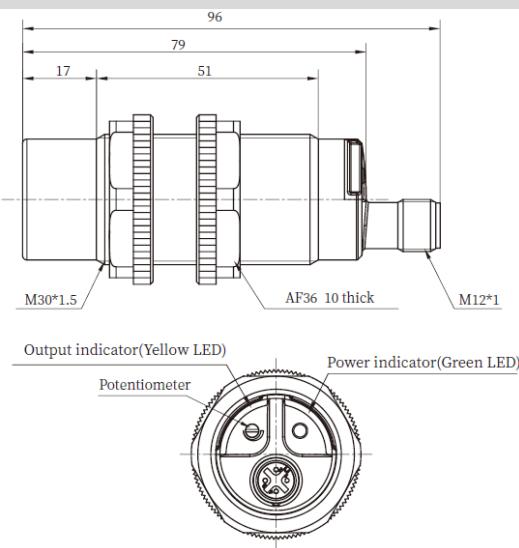

Wiring diagram

